




linear display lighting products

POP Lighting Front Mount Fluorescent Display fixtures are premium grade channels specifically designed for long - term installation.

- 21 Gauge Cold Rolled Steel Housings (stainless, aluminum optional)
- 120 V standard; or 277 V and universal ballast optional
- UL Listed
- Integral Mounting Hardware
- Baked white enamel finish
- Individual unit packaging
- T-12, T-8, T-5, Twin Tube and Compact Fluorescent lamps
- Energy saving magnetic or electronic Class P ballasts

FMC Series Front Mount Channels

Fixture	Lamp Type	Lamp Count	Lamp Type	# Lamps; Watts			Dimensions
				L	W	H	
FMC	T-12	24	T-12	18"	2.75"	3.75"	
FMC	T-12	36	T-12	24"	2.75"	3.75"	
FMC	T-12	48	T-12	36"	2.75"	3.75"	
FMC	T-12	60	T-12	48"	2.75"	3.75"	
FMC	T-12	72	T-12	60"	2.75"	3.75"	
FMC	T-12	96	T-12	72"	2.75"	3.75"	
FMC	T-8	15	T-12	96"	2.75"	3.75"	
FMC	T-8	17	T-8	18"	2"	3"	
FMC	T-8	25	T-8	24"	2"	3"	
FMC	T-8	32	T-8	36"	2"	3"	
FMC	T-8	40	T-8	48"	2"	3"	
FMC	T-5	14	T-8	60"	2"	3"	
FMC	T-5	21	T-5	22.5"	1.5"	2"	
FMC	T-5	28	T-5	34.5"	1.5"	2"	
FMC	T-5	35	T-5	46.5"	1.5"	2"	
FMC	TT-5	18	T-5	58.5"	1.5"	2"	
FMC	TT-5	40	TT-5	9"	2"	3"	
FMC	PL	9	CF-4	7"	2"	2"	
FMC	PL	13	CF-4	9"	2"	2"	

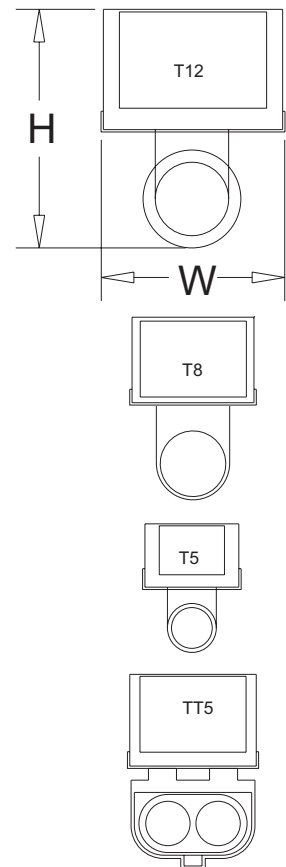

ORDER FORMAT

Fixture Type - Lamp Type - Lamp Count - Options

- 277 Volt
- Electronic Ballast
- Cord & Plug
- Remote Ballast
- Switch

POPLighting
 1100 West Indiana Avenue
 Philadelphia PA 19133
 215.430.7000
 fax 215.430.0431
www.poplighting.com
info@poplighting.com