



SMC SIDE MOUNT FLUORESCENT FIXTURES

linear display lighting products


POP Lighting Three Lamp Fluorescent Display fixtures are premium grade channels specifically designed for long - term installation.

- 21 Gauge Cold Rolled Steel Housings (stainless, aluminum optional)
- 120 V standard; or 277 V and universal ballast optional
- UL Listed
- Integral Mounting Hardware
- Baked white enamel finish
- Individual unit packaging
- T-12, T-8, T-5, and Twin Tube Fluorescent lamps
- Energy saving magnetic or electronic Class P ballasts

SMC Series Side Mount Channels for One or Two Lamps

Fixture	Lamp Type	# Lamps; Watts	Dimensions		
			L	W*	H
SMC	T-12	2 - 3 15	18"	4.75"	2"
SMC	T-12	2 - 3 24	24"	4.75"	2"
SMC	T-12	2 - 3 36	36"	4.75"	2"
SMC	T-12	2 - 3 48	48"	4.75"	2"
SMC	T-12	2 - 3 60	60"	4.75"	2"
SMC	T-12	2 - 3 72	72"	4.75"	2"
SMC	T-12	2 - 3 96	96"	4.75"	2"
SMC	T-8	2 - 3 15	18"	4.75"	1.5"
SMC	T-8	2 - 3 17	24"	4.75"	1.5"
SMC	T-8	2 - 3 25	36"	4.75"	1.5"
SMC	T-8	2 - 3 32	48"	4.75"	1.5"
SMC	T-8	2 - 3 40	60"	4.75"	1.5"
SMC	T-5	2 - 3 14	22.5"	3.5"	1"
SMC	T-5	2 - 3 21	34.5"	3.5"	1"
SMC	T-5	2 - 3 28	46.5"	3.5"	1"
SMC	T-5	2 - 3 35	58.5"	3.5"	1"
SMC	TT-5	2 - 3 18	9"	5.8"	1"
SMC	TT-5	2 - 3 40	23"	5.8"	1"

- refers to maximum width with two side mounted lamps

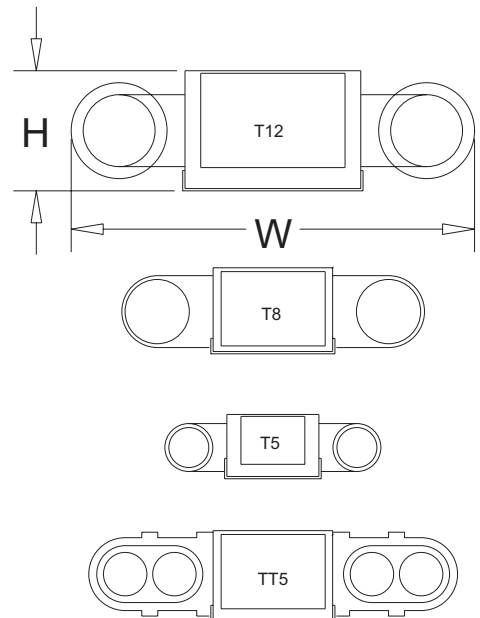

ORDER FORMAT

Fixture Type - Lamp Type - Lamp Count - Options

- 277 Volt
- Electronic Ballast
- Cord & Plug
- Remote Ballast
- Switch

POPLighting
 1100 West Indiana Avenue
 Philadelphia PA 19133
 215.430.7000
 fax 215.430.0431
www.poplighting.com
info@poplighting.com